


Installing the IPC-6 RMP

Step 1


CAUTION! Unit must be unplugged before cover is removed

- A: Remove screws from the IPC-6 chassis
- B: Remove the top cover.




Step 2

- C: Remove screws from the bottom of the front panel and detach from chassis

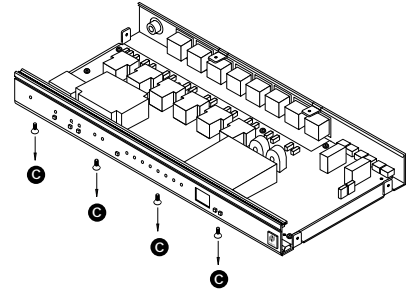


Step 3

- D: Slide out the plastic retainers




Step 4

- E: Pull the circuit board away from the front panel

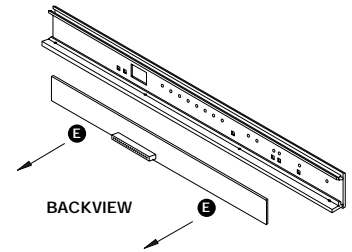


Step 5

- F: Gently line-up and place circuit board into the rack-mount panel

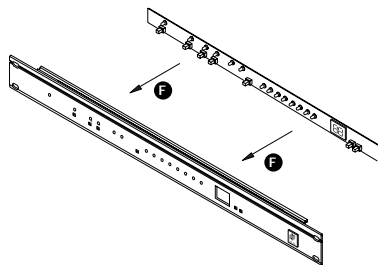


Step 6

- G: Slide the plastic retainers back into place

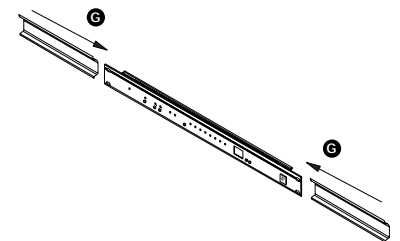


Step 7

- H: Return the front panel to the chassis and replace screws at the bottom of the front panel

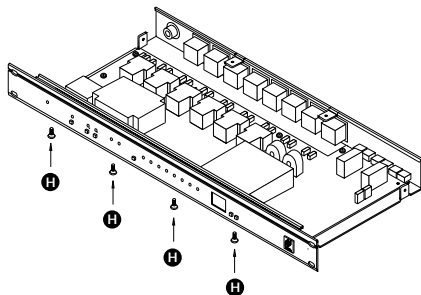

Step 8

- I: Return the cover to the unit
- J: Return the screws to the RVL-6 cover

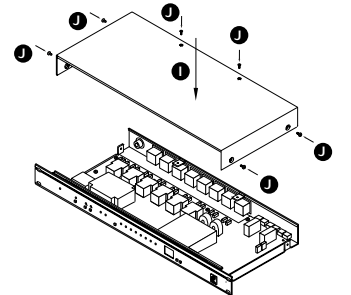

Niles Audio Corporation 12331 SW 130th Street Miami, Florida 33186 Tel: (305) 238-4373 Fax: (305) 238-0185

© 1999 Niles Audio Corporation. All rights reserved. Because Niles constantly strives to improve the quality of its products, Niles reserves the right to change product specifications without notice. Niles and the Niles logo are registered trademarks of Niles Audio Corporation. Printed in the USA 6/96 DS00170 www.nilesaudio.com